

## **Ontinental Radial Repair Chart**

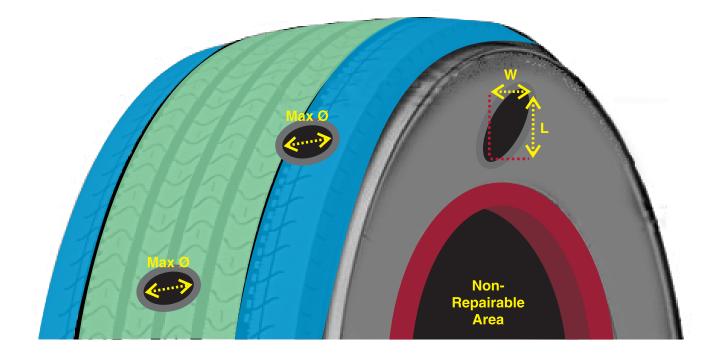

## **Continental Radial Truck Tire Repair Chart**

CROWN AREA BEGINS 1 1/2" (40mm) IN FROM TREAD EDGE

				1/2 (401111) 11	I FROM TREAD	LDGL	
		Tub	Tube-Type Tire Sizes			Tubeless Tire Sizes	
Sidewall Injury		Shoulder Injury Diameter (S-T Area)	Crown Injury Diameter (T-T Area)	Light Truck Through Load Range E	Through Upper Truck		
				6.50-12.50	7.50-10.00	11.00-14.00	
			0	LT 215-285	8-11 235/80-275/80 225/75-295/75	12-16.5 295/80-315/80 305/75-445/65 425/50-495/45	
	Longin		1/4" (6mm)	111	111	111	
		1/4" (6mm)		22	24	26	
			5/16" (8mm)	111	111	111	
		5/16" (8mm)		22	24	26	
			3/8" (10mm)	112	112	112	
1 Cable	1 1/2" (40mm)			22	24	24	
1 Cable	3 1/8" (80mm)			22	24	24	
1 Cable	4 3/4" (120mm)				24	24	
1 Cable	6" (150mm)				26	26	
2 Cables	3/4" (20mm)			22	24	24	
2 Cables	1 1/2" (40mm)			22	24	24	
2 Cables	2 3/8" (60mm)			22	24	26	
2 Cables	5 1/8" (130mm)				26	26	
3/8" (10mm)	1 1/2" (40mm)			22	26	40	
3/8" (10mm)	2 3/8" (60mm)			22	26	40	
3/8" (10mm)	3 1/8" (80mm)			26	40	42	
<u>3/8" (10mm)</u>	<u>5 1/8" (130mm)</u>				42	44	
		3/8" (10mm)		24	26	26	
			1/2" (13mm)	22	33 or 40	33 or 40	
1/2" (13mm)	1 1/2" (40mm)			22	40	40	
1/2" (13mm)	2 3/4" (70mm)			22	40	42	
1/2" (13mm)	3 3/4" (95mm)			40	42	42	
1/2" (13mm)	<u>5 1/8" (130mm)</u>	1 (01) (10		40	44	44	
		1/2" (13mm)	$0/4^{2}/(00 m m m)$	40	40	40	
2/4" (20mm)	1" (05mm)		3/4" (20mm)	22	33 or 40	35 or 42	
3/4" (20mm)	1" (25mm)			22	40 42	40 42	
3/4" (20mm) 3/4" (20mm)	2 1/2" (65mm)			24	42	42	
3/4 (2011111) 3/4" (20mm)	4 3/8" (110mm) 5 1/8" (130mm)				42	44	
0/4 (2011111)		3/4" (20mm)		40	44	44	
		0/4 (2011111)	1" (25mm)	33 or 40	35 or 42	42	
1" (25mm)	2" (50mm)			40	42	44	
1" (25mm)	3 1/4" (80mm)			10	42	44	
1" (25mm)	4" (100mm)				44	44	
		1" (25mm)			44	44	
		()	1 1/4" (32mm)		35 or 42	44	
1 1/4" (32mm)	2" (50mm)				42	44	
1 1/4" (32mm)	3 1/8" (80mm)				44	44	



A-B NON-REPAIRABLE AREA					
Passenger Tires	1 1/2" (40mm)				
TRUCK TIRE A-B NON REPAIRABLE AREA					
6.50-7.00 (165-195)	2 1/2" (65mm)				
7.50-16.00 (205-385)	3" (75mm)				
17.5-23.5 (425-600)	3 1/2" (90mm)				
AG TIRE A-B NON REPAIRABLE AREA					
13.6-16.9 (345-430)	4" (100mm)				
18.4-20.8 (465-530)	4 1/2" (115mm)				
23.1 & Larger (585 & larger)	5 1/2" (140mm)				

REPAIR UNIT DIMENSIONS							
Repair Unit	Inches	Millimeters					
CLC111R	2.5	65					
CLC112R	3.5	90					
CLC22R	3 X 6.5	75 X 165					
CLC24R	3.38 X 8.75	85 X 220					
CLC26R	3 X 10	75 X 250					
CLC33R	4 X 5	100 X 125					
CLC35R	5 X 6	125 X 150					
CLC40R	4 X 8	100 X 200					
CLC42R	5 X 10	125 X 250					
CLC44R	5 X 13	125 X 330					

REPAIR UNITS SHOWN BOXED IN GREEN ARE LIMITED TO THE CROWN (T-T) AREA ONLY.



Continental Tire the Americas, LLC 1830 MacMillan Park Dr. Fort Mill, SC 29707

NOTE: THIS SECTION REPAIR CHART IS A GUIDELINE ONLY. LOAD, SPEED AND HIGHWAY APPLICATION CAN AFFECT THE LIMITATIONS OF SECTION REPAIRS.

Information courtesy of Tech International, Johnstown, OH